


**QUICK
REFERENCE
GUIDE**

- Solid Bushings ➤ Solid Rollers ➤ High Grade Alloy Steel
- All Shot Peened Parts . Specially Treated Pins & Bushings


HKK Nickel-Plated chains are used in mildly corrosive environments such as outdoors. Carbon steel Nickel-Plated chain is plated before assembly to ensure complete protection of all parts, while providing maximum strength. HKK Nickel-Plated chains are manufactured with solid rollers and solid bushings to extend chain life. Nickel-Plated attachment chains are also available. Zinc Plated chains are also available upon request.

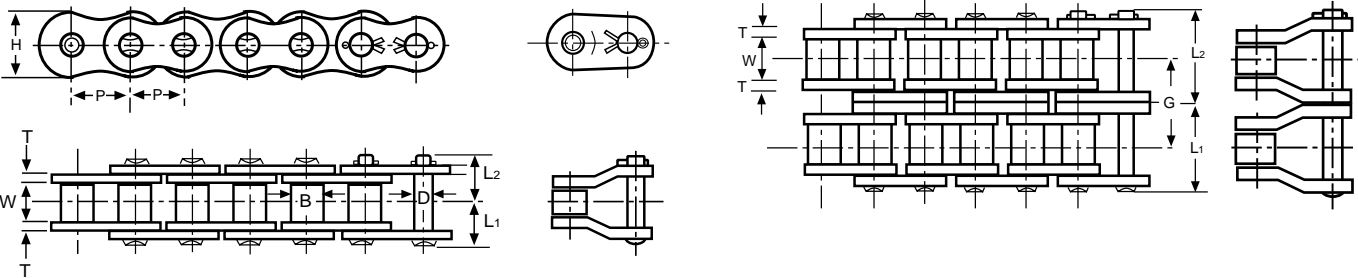

HKK Nickel Plated Chain No.	Pitch A	Roller		Pin Dia. D	Plate		Overall Width		Transverse Pitch G	Maximum Allowable Load (lbs)	Average Ultimate Strength (lbs)	Avg. Weight Per Foot (lbs) Riveted
		Dia. B	Width W		Height H	Thickness T	L1	L2				
* HKK 25-NP	1/4	0.130	1/8	0.0905	0.236	0.030	0.150	0.185	-	140	1,050	0.09
* HKK 35-NP	3/8	0.200	5/16	0.141	0.347	0.050	0.233	0.267	-	480	2,400	0.23
** HKK 41-NP	1/2	0.306	1/4	0.141	0.386	0.050	0.266	0.312	-	500	2,600	0.27
HKK 40-NP	1/2	0.312	3/16	0.156	0.457	0.060	0.323	0.354	0.567	810	4,300	0.40
HKK 40-2-NP							0.603	0.645				
HKK 50-NP	5/8	0.400	3/8	0.200	0.571	0.080	0.400	0.445	0.712	1,400	7,200	0.67
HKK 50-2-NP							0.752	0.803				
HKK 60-NP	3/4	0.469	1/2	0.234	0.689	0.094	0.500	0.548	0.898	1,950	99,000	0.98
HKK 60-2-NP							0.945	1.000				
HKK 80-NP	1	0.625	5/8	0.312	0.921	0.125	0.628	0.750	1.153	3,300	17,600	1.69
HKK 80-2-NP							1.201	1.319				

* - Rollerless Chain: Roller Diameter "B" is identical to the bushing diameter, as these chains have no rollers
 ** - Split Bushing Chains

Dimensions in inches & pounds

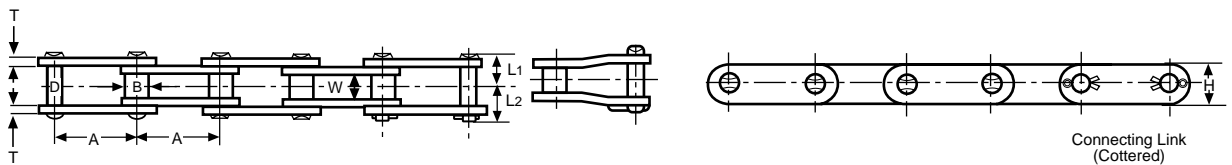

Connecting Link (Cottered)

HKK Nickel Plated Chain No.	Pitch A	Roller		Pin Dia. D	Plate		Overall Width		Average Ultimate Strength (lbs)	Avg. Weight Per Foot (lbs) Riveted
		Dia. B	Width W		Height H	Thickness T	L1	L2		
HKK C 2040-NP	1	0.312	5/16	0.156	0.450	0.060	0.323	0.378	4,300	0.32
HKK C 2050-NP	1-1/4	0.400	3/8	0.200	0.591	0.080	0.400	0.467	7,200	0.55
HKK C 2060H-NP	1-1/2	0.469	1/2	0.234	0.670	0.125	0.565	0.657	12,300	0.93
HKK C 2080H-NP	2	0.625	5/8	0.312	0.890	0.156	0.699	0.829	20,200	1.56

Transmission type also available.

Dimensions in inches & pounds