



A CHIORINO GROUP COMPANY

# PRODUCT CATALOG 2025



# TABLE OF CONTENTS

- 5 ULTRA-TUFF™
- 8 Belting Series
- 15 Accessories
- 16 Sprockets
- 17 Low-Friction Plastic Chain
- 18 Low Back Pressure Plastic Chain
- 19 Why Choose Us

# Tightening the Belt on Efficiency and Innovation

Our mission is to provide our customers with quality products that exceed their expectations. Ship in a timely manner, at commodity prices, without compromising the need to deliver outstanding customer service.






# ULTRA-TUFF™

## *Proven Protection From Foreign Matter Contamination*

### Safari Belting Food Safety Innovations

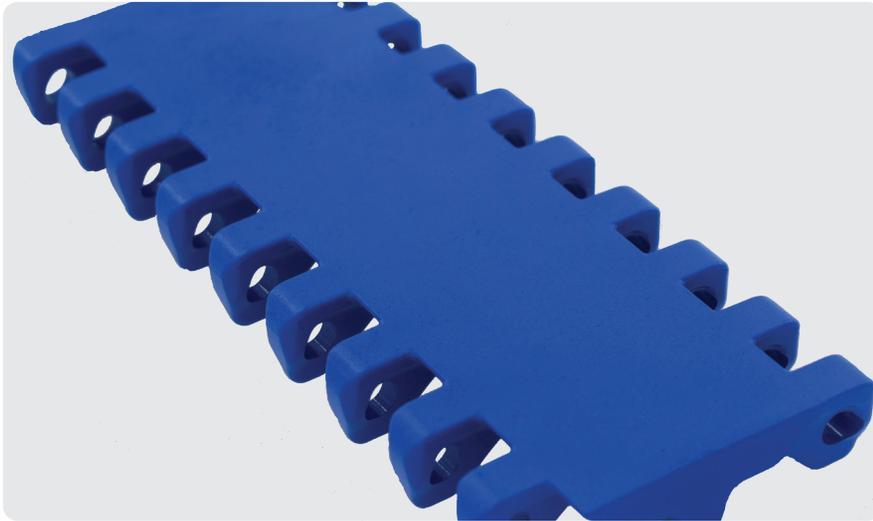

Safari Belting Systems, Inc. introduces Ultra-Tuff™, a revolutionary new resin whose unique performance profile offers manufacturers and OEMs, across multiple industries, a new solution for tough applications.



**Extreme Impact Resistance**  
250% Greater impact resistance than Acetal.



**Superior Chemical Resistance**  
Withstands constant exposure to PAA, sanitation, and processing chemicals.



**Exceptional Wear & Abrasion Resistance**  
Double (or more!) belt service life with zero broken modules.

## ULTRA-TUFF™

### Engineered Polymer for Today's Food Safety Requirements

ULTRA-TUFF™ is a next-generation, eco-conscious polymer engineered to deliver exceptional performance where other modular belts fall short. Its highly crystalline structure provides the perfect balance of strength, durability and chemical resistance - all in a single belt solution. What makes ULTRA-TUFF™ different is its ability to handle impact, harsh chemicals, and abrasion simultaneously. The result is a longer-lasting belt that reduces downtime, minimizes maintenance, and lowers total cost of ownership. For processors looking to upgrade performance while meeting sustainability goals, ULTRA-TUFF™ sets a new standard in plastic modular belting.

## ULTRA-TUFF XMD™

### X-Ray and Metal Detectable

Safari Belting's exclusive high-performance, ULTRA-TUFF™ product lines are available in a Metal and X-Ray Detectable (XMD) formulation, which meets or exceeds the 1.5 mm ferrous equivalent standard, while maintaining high impact, chemical, and abrasion resistance, making it the premier detectable belting on the market. Because ULTRA-TUFF™ is detectable by BOTH metal and x-ray detection equipment, it can be utilized across multiple applications, in numerous locations, making standardization simple.


## Benefits

### Dramatically Lower TCO

- Belting lasts 2 to 5 times longer
- Eliminating broken modules, reduces downtime, and maintenance expenses
- Excellent release properties reduces trim loss

## ULTRA-TUFF™ & ULTRA-TUFF XMD™ Belt Series & Styles

### Safari Series 225 - Heavy Duty 2.0" Pitch

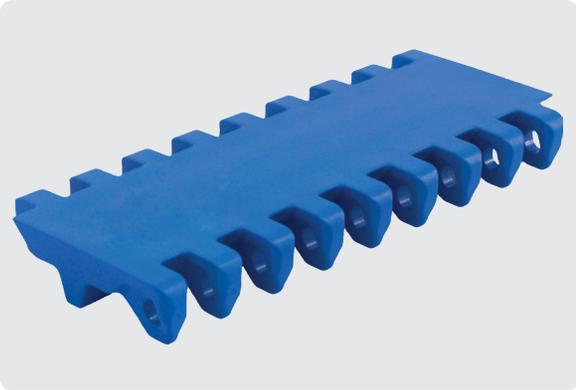

#### Imagine...Zero Broken Modules

The Safari Belting Series 225 ULTRA-TUFF™ belts can handle a wide variety of applications. These belts can be relied upon to do the day to day work on bone transfers, loin lines, dip-tanks, package handling, and more...without frequent module repairs or down time. ULTRA-TUFF™ belts last more than twice as long as conventional Acetal belts and provide unparalleled operational stability.


#### Surface Options

Flat Top, Dimple Top, Cone Top, Threaded Cone Top, Mini Rib & Perforated 11/32" Round Holes with and without Dimples

#### Accessories

Impact resistant, full & notched flights up to 6" tall.  
Impact resistant, full & notched cling-free flights up to 4" tall.  
Scoop and bucket flights 3", 4" & 6" tall.  
Sprockets from 4" to 10.3" PD with 1.5" & 2.5" sq. bore.

### Safari Series 250 - Heavy Duty 2.5" Pitch

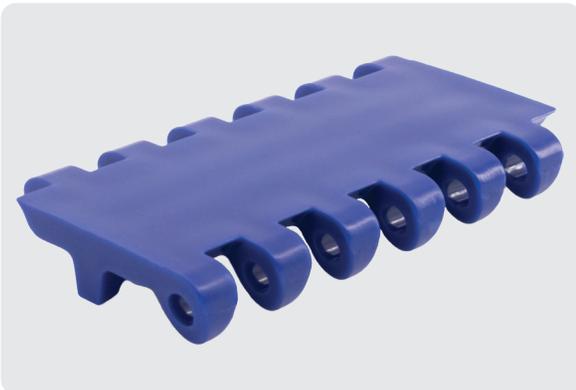

#### Solution for Challenging Applications

The Safari Belting Series 250 ULTRA-TUFF™ belts can handle the daily punishment of applications like boning tables, ham classifiers, etc., where frequent belt replacement & broken module repairs are the accepted "status quo".


#### Surface Options

Flat Top, Cone Top & Mini Rib.

#### Accessories

Impact resistant, full & notched flights up to 4" tall. Sprockets from 5" to 10.5" PD with 1.5" & 2.5" sq. bore.

## Safari Series 150 Standard Duty 1.0" Pitch

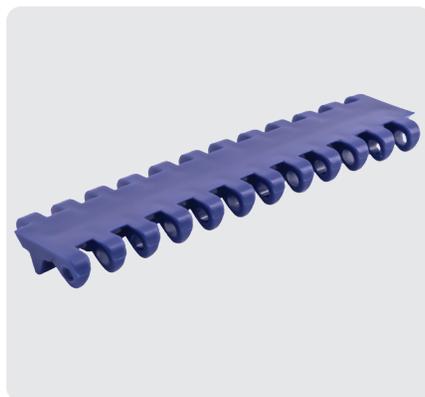

### Reduce Trim Loss

ULTRA-TUFF™ inherently repels materials like fats & oils, giving it unparalleled product release properties. Utilize Safari Belting Series 150 on trim lines for fast ROI.

### Surface Options

Flat Top & Dimple Top

### Accessories

Impact resistant, cling-free flights up to 4" tall.  
Sprockets from 1.8" to 6.4" with 1" to 1.5" bore.

## Safari Series 700BHD Standard Duty 1.07" Pitch



**High Heat + Abrasion Resistance** The Safari Belting Series 700BHD ULTRA-TUFF™ belts, with 38% open area, provide a superior solution for applications like tortilla cooling lines and de-pan bakery applications, where high heat tolerance (up to 302°F) plus impact & abrasion resistance are required.


### Surface Options

Flush Grid & Raised Rib

### Accessories

Impact resistant, full & notched flights up to 4" tall.  
Sprockets from 2.1" to 8.2" with 1" to 2.5" bore.

## Safari Series 500BHD Radius 1.0" Pitch

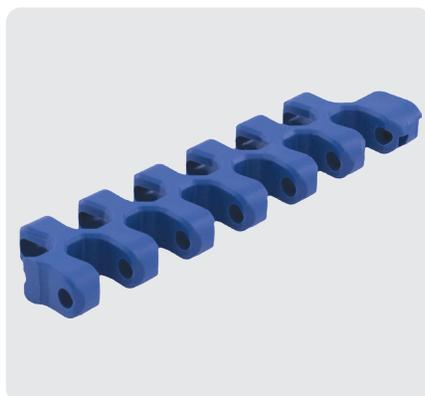

### Strength Through the Turn


The Safari Belting Series 500BHD ULTRA-TUFF™ belts combine the mechanical attributes of impact, strength & abrasion with a robust knuckle design to provide unsurpassed performance in standard radius belts.

**ULTRA-TUFF™ Surface Options** Flush Grid & High Deck

### Accessories

Impact resistant flights up to 4" tall.  
Sprockets from 2.9" to 7.48" with 1" to 2.5" bore.

## Safari Series 1100 Standard Duty .60" Pitch

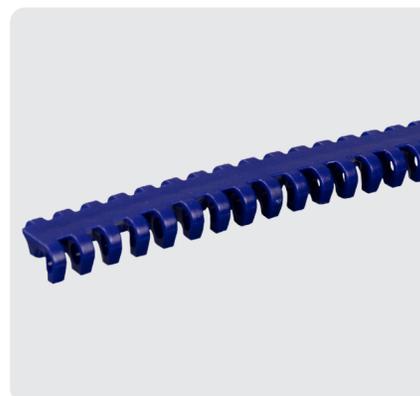

### Nose-bar Transfers

The Safari Belting Series 1100 provide versatile, ULTRA-TUFF™ options for tight, nose-bar transfers and small package handling.

**ULTRA-TUFF™ Surface Options** Flat Top, Flush Grid and Cone-Top

### Accessories

Impact resistant flights up to 2" tall.  
Sprockets from 2.3" to 6.1" with 1" to 1.5" bore.


# Belting Series

**SF-700DHD - Raised Rib - Replaces Intralox S900**



Pitch	1.07"
Thickness	.563"
Open Area	38%
Flights	NO
Conv Type	2

**SF-225DN - Dimple Top - Replaces Intralox S800**

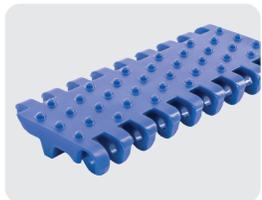


Pitch	2"
Thickness	.725"
Open Area	0%
Flights	YES
Conv Type	1

**SF-225ODN - Round Hole Dimple - Replaces Intralox S800**




Pitch	2"
Thickness	.725"
Open Area	14%
Flights	YES
Conv Type	1

**SF-300BHD - Radius Flush Grid - Replaces Intralox S2200**

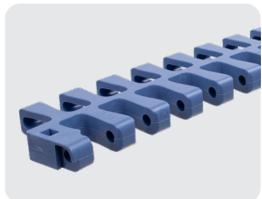

Pitch	1.77"
Thickness	.6"
Open Area	38%
Flights	NO/ YES
Conv Type	3

**SF-5A - Micro Pitch Flat Top - Replaces Intralox S560**

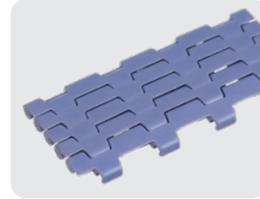

Pitch	.20"
Thickness	.16"
Open Area	0%
Flights	NO
Conv Type	3

**SF-150A - Flat Top - Replaces Intralox S1600**



Pitch	1"
Thickness	.4"
Open Area	0%
Flights	YES
Conv Type	1

**SF-225E - Mini Rib - Replaces Intralox S800**



Pitch	2"
Thickness	.755"
Open Area	0%
Flights	YES
Conv Type	1

**SF-225ON - 11/32" Round Hole - Replaces Intralox S800**



Pitch	2"
Thickness	.625"
Open Area	14%
Flights	YES
Conv Type	1

**SF-300BHDEL - Radius Grip Top - Replaces Intralox S2200**



Pitch	1.77"
Thickness	.8"
Open Area	38%
Flights	NO
Conv Type	3

**SF-5BD - Micro Pitch Flush Grid Dimple Top - Replaces Intralox S560**



Pitch	.20"
Thickness	.256"
Open Area	8%
Flights	NO
Conv Type	3

**SF-150D - Dimple Top - Replaces Intralox S1600**




Pitch	1"
Thickness	.475"
Open Area	0%
Flights	YES
Conv Type	1

**SF-225ELN - Grip Top - Replaces Intralox S800**




Pitch	2"
Thickness	.705"
Open Area	0%
Flights	YES
Conv Type	1

**SF-225TD - Threaded Cone Top - Replaces Intralox S800**

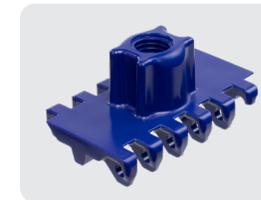


Pitch	2"
Thickness	.625"
Open Area	0%
Flights	YES
Conv Type	1

**SF-400C - Inline Roller Top - Replaces Intralox S400 Roller Top**

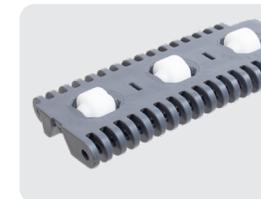


Pitch	2"
Thickness	.625"
Open Area	5%
Flights	NO
Conv Type	3

**SF-10A - Micro Pitch Flat Top - Replaces Intralox S560**

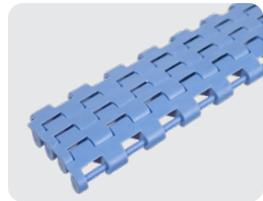

Pitch	.39"
Thickness	.276"
Open Area	0%
Flights	NO
Conv Type	3

**SF-10B- Micro Pitch Flush Grid - Replaces Intralox S560**

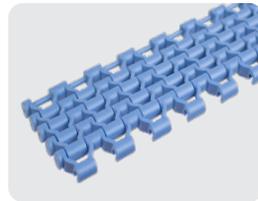


Pitch	.39"
Thickness	.276"
Open Area	24%
Flights	NO
Conv Type	3

**SF-700BHD - Flush Grid - Replaces Intralox S900**



Pitch	1.07"
Thickness	.344"
Open Area	38%
Flights	YES
Conv Type	2

**SF-225AN - Flat Top - Replaces Intralox S800**

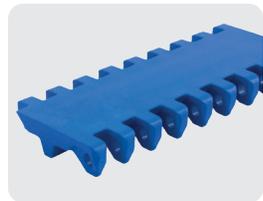

Pitch	2"
Thickness	.625"
Open Area	0%
Flights	YES
Conv Type	1

**SF-225BN - Perforated Flat Top - Replaces Intralox S800**




Pitch	2"
Thickness	.625"
Open Area	18%
Flights	YES
Conv Type	1

**SF-225CN - Roller Top - Replaces Intralox S800**




Pitch	2"
Thickness	1.06"
Open Area	3%
Flights	YES
Conv Type	1

**SF-225FGN - Flush Grid- Replaces Intralox S800**

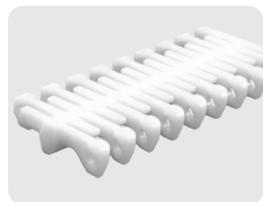

Pitch	2"
Thickness	.563"
Open Area	27%
Flights	YES
Conv Type	2

**SF-225FDN - Flush Grid Dimple Top - Replaces Intralox S800**

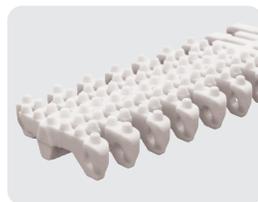


Pitch	2"
Thickness	.625"
Open Area	27%
Flights	YES
Conv Type	2

**SF-225H - Cone Top - Replaces Intralox S800**




Pitch	2"
Thickness	.625"
Open Area	0%
Flights	YES
Conv Type	1

**SF-250A - Flat Top - Replaces Intralox S1800**

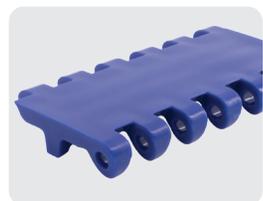

Pitch	2.5"
Thickness	.725"
Open Area	0%
Flights	YES
Conv Type	2

**SF-250D - Cone Top - Replaces Intralox S1800**

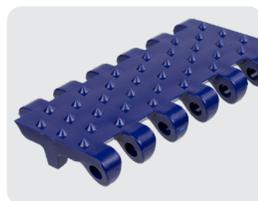

Pitch	2.5"
Thickness	.88"
Open Area	0%
Flights	YES
Conv Type	2

**SF-250E - Mini Rib - Replaces Intralox S1800**



Pitch	2.5"
Thickness	.855"
Open Area	0%
Flights	YES
Conv Type	2

**SF-40ORAM - Angled Roller Top - Replaces Intralox S400 ARB**



Pitch	2"
Thickness	.625"
Open Area	5%
Flights	NO
Conv Type	3

**SF-409C - Roller Top - Replaces Intralox S400 Transverse**



Pitch	2"
Thickness	.625"
Open Area	5%
Flights	NO
Conv Type	3

**SF-500BHD - Radius Flush Grid - Replaces Intralox S2400**



Pitch	1"
Thickness	.5"
Open Area	36%
Flights	YES
Conv Type	2

**SF-500BHDEL - Radius Grip Top - Replaces Intralox S2400**



Pitch	1"
Thickness	.70"
Open Area	36%
Flights	YES
Conv Type	2

**SF-500BHDD - Radius High Deck - Replaces Intralox S2400**



Pitch	1"
Thickness	.9"
Open Area	36%
Flights	NO
Conv Type	2

**SF-500B - Radius Flush Grid - Replaces Habasit M2540**



Pitch	1"
Thickness	.52"
Open Area	36%
Flights	NO/YES
Conv Type	1

**SF-502ELHD - Grip Top - Replaces Uni QNB-C**




Pitch	1"
Thickness	.52"
Open Area	0%
Flights	YES
Conv Type	1

**SF-700AN - Flat Top - Replaces Intralox S900**




Pitch	1.07"
Thickness	.384"
Open Area	0%
Flights	YES
Conv Type	1

**SF-700ABN - Perforated Flat Top - Replaces Intralox S900**

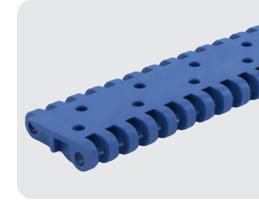

Pitch	1.07"
Thickness	.384"
Open Area	6%
Flights	YES
Conv Type	1

**SF-700GON - Open Grid - Intralox S900**

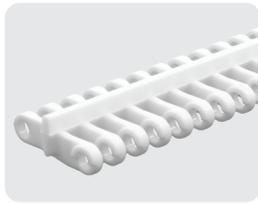

Pitch	1.07"
Thickness	.563"
Open Area	38%
Flights	YES
Conv Type	1

**SF-700MTN - Mesh Top - Replaces Intralox S900**



Pitch	1.07"
Thickness	.384"
Open Area	24%
Flights	YES
Conv Type	1

**SF-900A - Flat Top - Replaces Habasit M5020**



Pitch	2"
Thickness	.55"
Open Area	0%
Flights	YES
Conv Type	2

**SF-901DHD - Flush Grid Raised Rib - Rexnord RR2000**



Pitch	2"
Thickness	.95"
Open Area	36%
Flights	NO
Conv Type	1

**SF-1000A - Flat Top - Replaces Uni Light C**



Pitch	.75"
Thickness	.33"
Open Area	0%
Flights	YES
Conv Type	1

**SF-1000B - Perforated Flat Top - Replaces Uni Light 10%**




Pitch	.75"
Thickness	.33"
Open Area	27%
Flights	YES
Conv Type	1

**SF-F1000B - Flush Grid - Rexnord 1000**



Pitch	1"
Thickness	.339"
Open Area	42%
Flights	NO
Conv Type	1

**SF-1100AN - Flat Top - Intralox S1100**

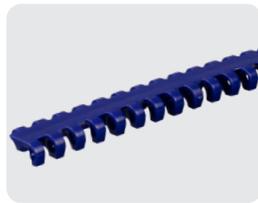

Pitch	.6"
Thickness	.344"
Open Area	0%
Flights	YES
Conv Type	1

**SF-1100ABN - Perforated Flat Top - Replaces Intralox S1100**



Pitch	.6"
Thickness	.344"
Open Area	3%
Flights	YES
Conv Type	1

**SF-500EL - Radius Grip Top - Replaces Habasit M2540**



Pitch	1"
Thickness	.6"
Open Area	36%
Flights	YES
Conv Type	1

**SF-502AHD - Flat Top - Replaces Uni QNB**



Pitch	1"
Thickness	.35"
Open Area	0%
Flights	YES
Conv Type	1

**SF-502DHD - Textured Flat Top - Replaces Uni JCB**



Pitch	1"
Thickness	.35"
Open Area	0%
Flights	YES
Conv Type	1

**SF-700BN - Flush Grid - Replaces Intralox S900**



Pitch	1.07"
Thickness	.384"
Open Area	38%
Flights	YES
Conv Type	1

**SF-700DN - Raised Rib - Replaces Intralox S900**



Pitch	1.07"
Thickness	.563"
Open Area	38%
Flights	NO
Conv Type	1

**SF-700ELN - Square Grip Top - Replaces Intralox S900**



Pitch	1.07"
Thickness	.57"
Open Area	0%
Flights	YES
Conv Type	1

**SF-900B - Flush Grid - Replaces Habasit M5033**



Pitch	2"
Thickness	.55"
Open Area	37%
Flights	YES
Conv Type	1

**SF-900BHD - Flush Grid - Replaces Habasit M5032**




Pitch	2"
Thickness	.63"
Open Area	32%
Flights	YES
Conv Type	1

**SF-901B - Flush Grid - Intralox S400**



Pitch	2"
Thickness	.63"
Open Area	18%
Flights	YES
Conv Type	2

**SF-1000EL - Grip Top - Replaces Uni Light Rubber Top**

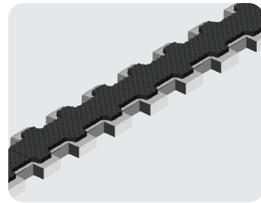


Pitch	.75"
Thickness	.41"
Open Area	0%
Flights	YES
Conv Type	1

**SF-F1000A - Flat Top - Rexnord 1000**



Pitch	1"
Thickness	.339"
Open Area	0%
Flights	NO
Conv Type	1

**SF-F1000AB - Perforated Flat Top - Rexnord 1000**

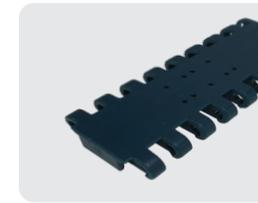

Pitch	1"
Thickness	.339"
Open Area	1%
Flights	NO
Conv Type	1

**SF-1100BN - Flush Grid - Replaces Intralox S1100**



Pitch	.6"
Thickness	.344"
Open Area	28%
Flights	YES
Conv Type	1

**SF-1100BNEL - Flush Grid Grip Top - Replaces Intralox S1100**




Pitch	.6"
Thickness	.429"
Open Area	28%
Flights	YES
Conv Type	1

**SF-1100D - Cone Top - Replaces Intralox S1100**




Pitch	.6"
Thickness	.37"
Open Area	0%
Flights	NO
Conv Type	1

**SF-1200A - Flat Top - Replaces Habasit M1220**

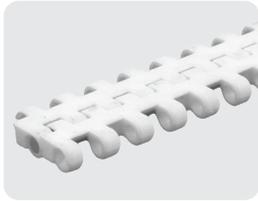

Pitch	.5"
Thickness	.334"
Open Area	0%
Flights	NO
Conv Type	2

**SF-1200B - Flush Grid - Replaces Habasit M1230**

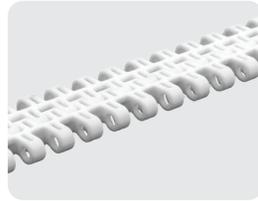


Pitch	.5"
Thickness	.334"
Open Area	19%
Flights	NO
Conv Type	2

**SF-1400A - Flat Top - Replaces Intralox S1400**




Pitch	1"
Thickness	.5"
Open Area	0%
Flights	NO
Conv Type	1

**SF-1500BN - Flush Grid - Replaces Intralox S1500**

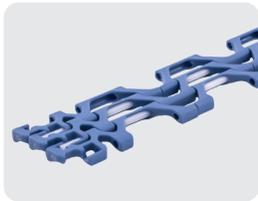

Pitch	.5"
Thickness	.25"
Open Area	48%
Flights	YES
Conv Type	1

**SF-1600A - Flat Top - Replaces Uni CPB**

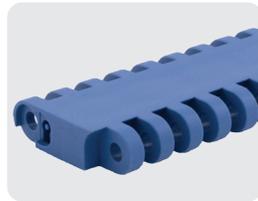

Pitch	2"
Thickness	.75"
Open Area	0%
Flights	NO
Conv Type	3

**SF-1600B - Perforated Flat Top - Replaces Uni CPB**



Pitch	2"
Thickness	.75"
Open Area	11%
Flights	NO
Conv Type	3

**SF-1800B - Perforated Flat Top - Replaces Uni XLB M2**



Pitch	2.5"
Thickness	1"
Open Area	10%
Flights	PUSHER
Conv Type	3

**SF-1800D - Textured Flat Top - Replaces Uni XLB M2**



Pitch	2.5"
Thickness	1.04"
Open Area	0%
Flights	PUSHER
Conv Type	3

**SF-1800E - Groove Top - Replaces Uni XLB M2 V8**



Pitch	2.5"
Thickness	1"
Open Area	0%
Flights	PUSHER
Conv Type	3

**SF-2400BGB - Radius Flush Grid with Hold Down Tabs - Replaces Intralox S2400 Flush Grid**



Pitch	1"
Thickness	.5"
Open Area	42%
Flights	YES
Conv Type	1

**SF-2400D - Radius High Deck Flush Grid - Replaces Intralox S2400 Flush Grid**



Pitch	1"
Thickness	.9"
Open Area	42%
Flights	NO
Conv Type	1

**SF-2400R - Radius Raised Rib - Replaces Intralox S2400 Raised Rib**




Pitch	1"
Thickness	.9"
Open Area	42%
Flights	NO
Conv Type	1

**SF-2500D - Raised Rib - Replaces Habasit M2531**



Pitch	1"
Thickness	.634"
Open Area	39%
Flights	NO
Conv Type	1

**SF-2500E - Mini Rib - Replaces Habasit M2527**

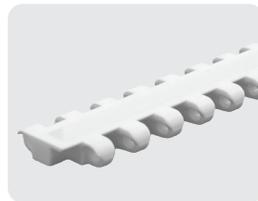

Pitch	1"
Thickness	.512"
Open Area	0%
Flights	YES
Conv Type	1

**SF-2500EL - Grip Rib - Replaces Habasit M2527**



Pitch	1"
Thickness	.55"
Open Area	0%
Flights	YES
Conv Type	1

**SF-14OOD** - Textured Top - Replaces *Intralox S1400*




Pitch	1"
Thickness	.5"
Open Area	0%
Flights	NO
Conv Type	1

**SF-14OOEL** - Grip Top - Replaces *Intralox S1400*



Pitch	1"
Thickness	.9"
Open Area	0%
Flights	NO
Conv Type	1

**SF-14OOZS** - Embedded Diamond Top - Replaces *Intralox S1400*

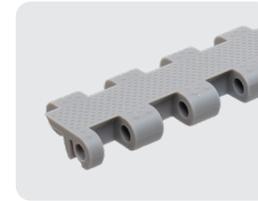

Pitch	1"
Thickness	.5"
Open Area	0%
Flights	NO
Conv Type	1

**SF-16OOD** - Textured Flat Top - Replaces *Uni CPB*



Pitch	2"
Thickness	.78"
Open Area	0%
Flights	NO
Conv Type	3

**SF-17OOB** - Flush Grid - Replaces *Intralox S1700*




Pitch	1.5"
Thickness	.75"
Open Area	37%
Flights	YES
Conv Type	1

**SF-18OOA** - Flat Top - Replaces *Uni XLB M2*



Pitch	2.5"
Thickness	1"
Open Area	0%
Flights	PUSHER
Conv Type	3

**SF-20OOA** - Zero Tangent - Replaces *Intralox S2100*

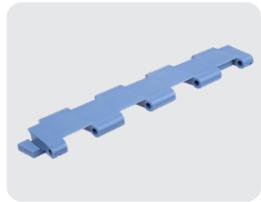

Pitch	23.6"
Thickness	.39"
Open Area	0%
Flights	YES
Conv Type	3

**SF-24OOA** - Radius Flat Top - Replaces *Intralox S2400 Radius Flat Top*




Pitch	1"
Thickness	.5"
Open Area	0%
Flights	YES
Conv Type	1

**SF-24OOB** - Radius Flush Grid - Replaces *Intralox S2400 Radius Flush Grid*




Pitch	1"
Thickness	.5"
Open Area	42%
Flights	YES
Conv Type	1

**SF-24OOT** - Tight Turn Radius Flush Grid - Replaces *Intralox S2400 Tight Turn Flush Grid*

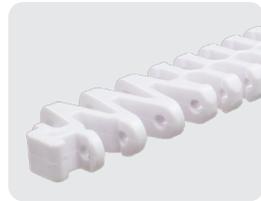


Pitch	1"
Thickness	.5"
Open Area	42%
Flights	YES
Conv Type	1

**SF-25OOA** - Flat Top - Replaces *Habasit M2520*

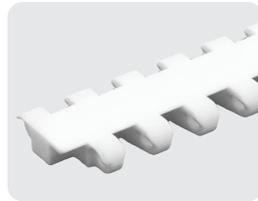

Pitch	1"
Thickness	.4"
Open Area	0%
Flights	YES
Conv Type	1

**SF-25OOB** - Flush Grid - Replaces *Habasit M2533*

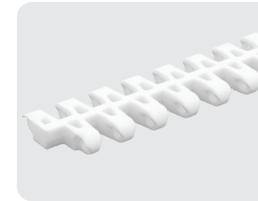

Pitch	1"
Thickness	.4"
Open Area	32%
Flights	YES
Conv Type	1

**SF-26OOB** - Flush Grid - Replaces *Habasit F51/Uni OWL*




Pitch	1"
Thickness	.433"
Open Area	44%
Flights	NO
Conv Type	3

**SF-30OOB** - Flush Grid - Replaces *Uni SNB M2 34%*



Pitch	1"
Thickness	.386"
Open Area	25%
Flights	NO
Conv Type	3

**SF-32OOA** - Flat Top - Replaces *Intralox S1000*

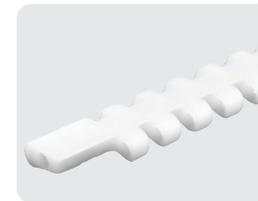

Pitch	.6"
Thickness	.34"
Open Area	0%
Flights	NO
Conv Type	1

**SF-3200C** - Roller Top - *Replaces Intralox S1000*



Pitch	.6"
Thickness	.453"
Open Area	10%
Flights	NO
Conv Type	1

**SF-3200EL** - Grip Top - *Replaces Intralox S1000*



Pitch	.6"
Thickness	.433"
Open Area	0%
Flights	NO
Conv Type	1

**SF-T95ORAM** - Angled Roller Top - *Replaces Intralox S7000*



Pitch	3.2"
Thickness	.5"
Open Area	3%
Flights	NO
Conv Type	1

**SF-3900CN** - Transverse Roller Top - *Replaces Transverse Roller Top Belts*



Pitch	2"
Thickness	.787"
Open Area	14%
Flights	NO
Conv Type	3

**SF-6800A** - Flat Top - *Replaces Uni ACB*



Pitch	1.5"
Thickness	.748"
Open Area	0%
Flights	NO
Conv Type	3

**SF-6800D** - Textured Flat Top - *Replaces Uni ACB*



Pitch	1.5"
Thickness	.75"
Open Area	0%
Flights	NO
Conv Type	3

**SF-6990A** - Flat Top - *Replaces Rexnord 6995*




Pitch	2.25"
Thickness	.717"
Open Area	0%
Flights	PUSHER
Conv Type	1

**SF-6990D** - Textured Top - *Replaces Rexnord 6995*



Pitch	2.25"
Thickness	.717"
Open Area	0%
Flights	PUSHER
Conv Type	1

**SF-1005LBP** - Low Back Pressure Roller Top - *Replaces Rexnord LBPI005*

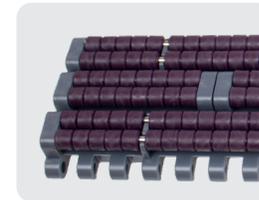

Pitch	1.0"
Thickness	.79"
Open Area	0%
Flights	NO
Conv Type	1

**CONVERSION KEY**

- TYPE 1** SPLICE-IN + SAME SPROCKET
- TYPE 2** SAME SPROCKETS (NO SPLICE)
- TYPE 3** SPROCKET CHANGE REQUIRED

# Accessories

## STREAMLINE FLIGHTS (Smooth Surface - Full & Notched)




SERIES	HEIGHT
225	Up to 6"
250	Up to 4"
700	Up to 3"
900	Up to 6"
900BHD	7/16"
901	Up to 4"
1000	Up to 6"
1100	Up to 2"
1500	Up to 1"
1700	Up to 3"
2400	Up to 3"
2500	Up to 3"

## CLING-FREE FLIGHTS (Ridge Surface - Full & Notched)



SERIES	HEIGHT
150	Up to 4"
225	Up to 4"
500BHD	Up to 4"
502	Up to 1"
700	Up to 4"
2400	Up to 3"

## FINGER PLATES

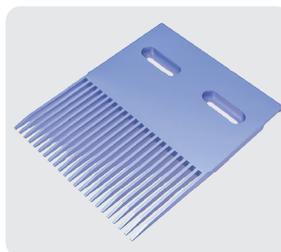

SERIES
700DHD
700DN
901DHD

## SCOOP\* & BUCKET FLIGHTS (Smooth Surface - Full & Notched)



SERIES	HEIGHT
225	3", 4", 6"

\* Custom flights available


## PUSHERS




SERIES	HEIGHT
502	.39"
1800	2"
6990	1"

# Sprockets

**STANDARD**

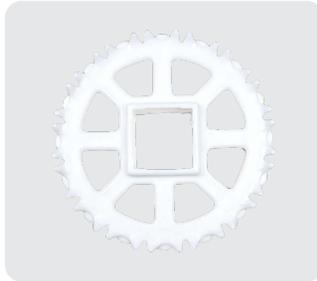

**TWO-ROW (2R)**

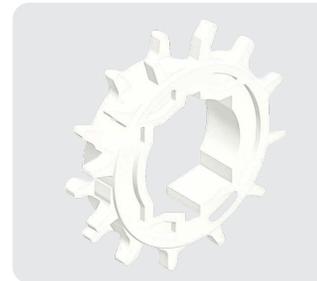

**SPLIT**



**SERIES 5**  
44T

**SERIES 10**  
24T

**SERIES 150**  
6T  
8T  
10T  
12T  
16T  
20T

**SERIES 225**  
6T  
8T  
10T  
12T  
16T

**SERIES 250**  
6T  
8T  
10T  
13T

**SERIES 300BHD**  
8T  
12T

**SERIES 400**  
6T  
8T  
10T  
12T  
16T

**SERIES 500BHD**  
12T  
15T  
18T  
21T  
24T

**SERIES 502AHD**  
12T  
15T  
18T  
19T  
24T

**SERIES 700**  
6T  
9T  
10T  
12T  
18T  
20T  
24T

**SERIES 900**  
6T  
8T  
9T  
10T  
12T

**SERIES 901B**  
6T  
8T  
10T  
12T  
16T  
17T

**SERIES 901DHD**  
9T  
16T

**SERIES 1000**  
7T  
10T  
17T  
24T

**SERIES F1000**  
16T  
20T

**SERIES 1100**  
12T  
16T  
18T  
20T  
24T  
26T  
32T

**SERIES 1200**  
10T  
15T  
19T  
24T  
28T

**SERIES 1400**  
12T  
15T  
16T  
18T  
21T  
24T

**SERIES 1500**  
10T  
12T  
14T  
17T  
19T  
24T  
36T

**SERIES 1600**  
12T  
15T  
18T

**SERIES 1800**  
10T  
13T  
15T

**SERIES 2500**  
10T  
12T  
15T  
18T  
20T

**SERIES 3200**  
16T  
24T  
32T

**SERIES 3900C**  
10T  
16T

**SERIES 6800**  
10T  
11T

**SERIES 6990**  
14T  
17T

**SERIES 1005LBP**  
18T

**Additional sizes available, split and standard options available**

# Low-Friction Plastic Chain

## LFS-820 & LFS-820 EL



Pitch 1.5"

Thickness .189"

- K250 (2.5" wide)
- K325 (3.25" wide)
- K350 (3.5" wide)
- K400 (4" wide)
- K450 (4.5" wide)
- K600 (6" wide)
- K750 (7.5" wide)

## LFS-821 & LFS-821 EL



Pitch 1.5"

Thickness .189"

- K750 (7.5" wide)
- K1000 (10" wide)
- K1200 (12" wide)

## LFS-88OTAB & LFS-88OTAB EL



Pitch 1.5"

Radius By Width 18", 19.7", 22", 24"

Thickness .157"

- K325 (3.25" wide)
- K450 (4.5" wide)
- K600 (6" wide)
- K750 (7.5" wide)

## LFS-882TAB & LFS-882TAB EL




Pitch 1.5"

Radius 24"

Thickness .189"

- K450 (4.5" wide)
- K600 (6" wide)
- K750 (7.5" wide)
- K1000 (10" wide)
- K1200 (12" wide)

## LFS-F3000A & F3000A TAB

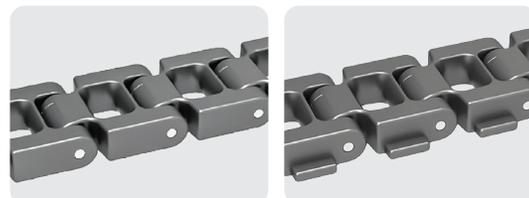


Pitch 2.0"

Radius 24"

Thickness .91"

## LFS-F3000B & F3000B TAB

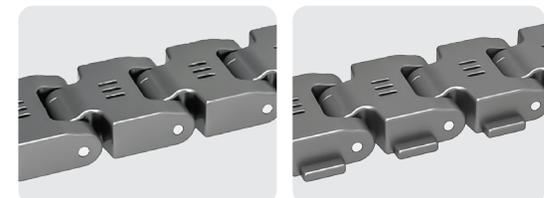


Pitch 2.0"

Radius 24"

Thickness .91"

# Low Back Pressure Plastic Chain

## LBP - 821

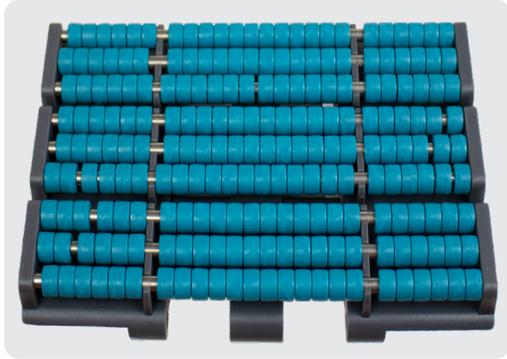

Pitch


1.5"

Thickness

1.12"

- K750 (7.5" wide)
- K1000 (10" wide)
- K1200 (12" wide)

## LBP 882TAB

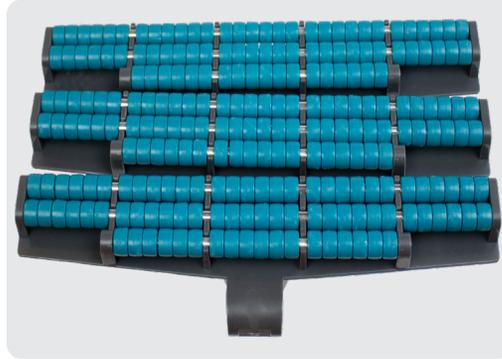

Pitch

1.5"

Thickness

.189"

- K375 (3.75" Wide)
- K450 (4.5" wide)
- K750 (7.5" wide)
- K1000 (10" wide)
- K1200 (12" wide)



## Why Choose Us

**Safari Belting is a US-based leader in plastic modular belting and conveying systems.**

As part of the Chiorino Group, we bring together global resources with a responsive, customer-driven, approach to serve food processing, packaging, logistics, and industrial markets. Our success is built on innovation, reliability, and a commitment to solving problems where they happen - on the floor, in the field and at the heart of our customers' operations. From MRO to OEM, Safari Belting helps you run stronger, cleaner and more efficiently.



**DELIVER EXCELLENCE**



**WORK TIRELESSLY**



**INSPIRE OTHERS**

Safari Belting is a testament to American innovation and determination. Established in 2005, we began with a single plastic modular belt design and have since evolved into a leader in the industry. As a company of the Chiorino Group, we bring a legacy of excellence and quality to every product we design.

Our journey is marked by a steadfast commitment to core values and an unwavering dedication to excellence. Safari Belting has significantly expanded its product line to over 400 belting solutions, serving plants worldwide. Our success is rooted in our ability to continuously challenge industry norms and focus on solutions rather than mere sales.

At the heart of our innovation is a strong emphasis on R&D, particularly in enhancing the food safety performance of modular plastic belting. While our primary clientele includes meat and poultry processing, we proudly serve multiple industries with tailored solutions. From food processing to packaging and beyond, our products are designed to meet diverse needs across various sectors.

## CONTACT US

Safari Belting Systems, Inc.  
220 North Mahaffie Street  
Olathe, KS, 66061  
T: (888) 662-6611  
T: (913) 254-7582  
F: (888) 234-3070  
E: [Info@SafariBelting.com](mailto:Info@SafariBelting.com)

Chiorino S.p.A.  
Via Sant'Agata, 9 13900  
Biella - Italia  
T: +390158489.1  
F: +390158489161  
E: [chiorino@chiorino.com](mailto:chiorino@chiorino.com)